


## haflowtic CP 60 data sheet




### Technical data

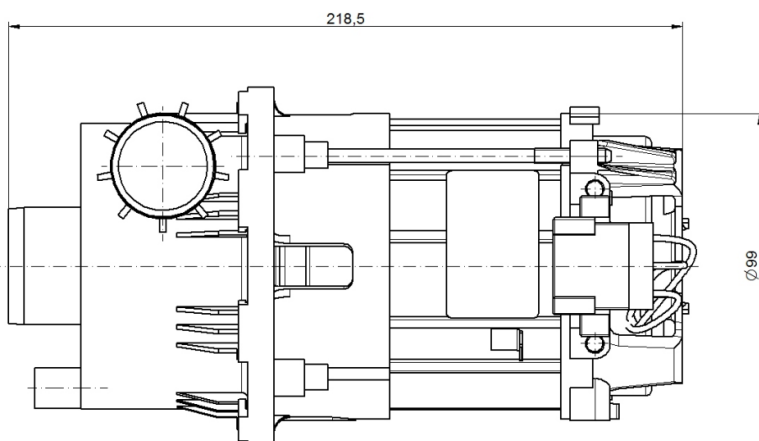



Description	Specification
Voltage	200–240 V
Frequency	60 Hz
Thermal protector	1~ internal/ 3~ on request
Degree of protection	IP00
Ambient temperature up to 60° C	Higher on request
Insulation class	F
Phase	1~
Life time	Depends on application and medium to be pumped
Medium ph-level	7 (3-11 with PP) to be tested in the application
Pump housing	Plastic PP glas fibre or mineral reinforced
Impeller	Plastic PP glas fibre reinforced
Sealing rubbers Mechanical seal	On request
Connection (customizable)	6,3 x 0,8 mm, wire
Capacitor (costumazible)	Optional
Approvals	On request (VDE,UL, CSA)
Draining nozzle	Optional
Inner diameter in/outlet	33/33 mm

Direction of rotation

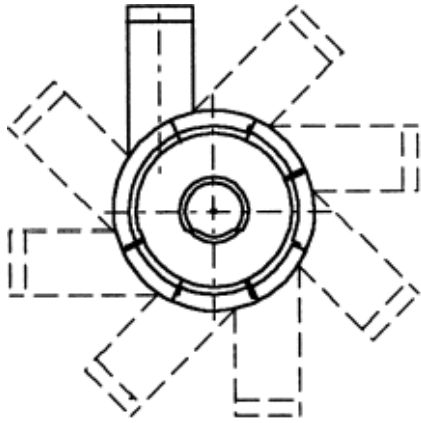

Curve

Connection scheme (example)

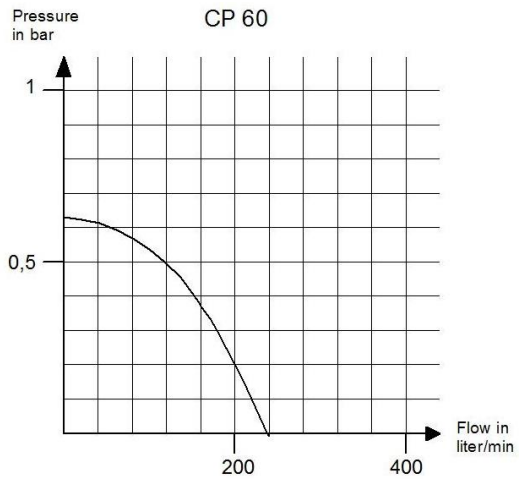

Notes

A large grid area for notes, consisting of a 20x20 grid of small squares.